


ANGULAR CONTACT BALL BEARINGS

BEARING NO.		DIMENSION			WEIGHT	
CILINDRICAL BORE	CONICAL BORE	d	D	B	CILINDRICAL BORE	CONICAL BORE
1300	-	10	35	11	0.058	-
1301	-	12	37	12	0.066	-
1302	-	15	42	13	0.092	-
1303	-	17	47	14	0.128	-
1304	1304K	20	52	15	0.160	0.158
1305	1305K	25	62	17	0.255	0.251
1306	1306K	30	72	19	0.383	0.377
1307	1307K	35	80	21	0.500	0.492
1308	1308K	40	90	23	0.709	0.698
1309	1309K	45	100	25	0.953	0.938
1310	1310K	50	110	27	1.200	1.180
1311	1311K	55	120	29	1.580	1.560
1312	1312K	60	130	31	1.960	1.930
1313	1313K	65	140	33	2.420	2.380
1314	1314K	70	150	35	2.990	-
1315	1315K	75	160	37	3.550	-
1316	1316K	80	170	39	4.170	4.110
1317	1317K	85	180	41	4.960	4.890
1318	1318K	90	190	43	5.180	5.690
1319	1319K	95	200	45	6.690	6.590



BEARING NO.		DIMENSION			WEIGHT	
CILINDRICAL BORE	CONICAL BORE	d	D	B	CILINDRICAL BORE	CONICAL BORE
2304	2304 K	20	52	21	0.206	0.201
2305	2305 K	25	62	24	0.334	0.326
2306	2306 K	30	72	27	0.496	0.485
2307	2307 K	35	80	31	0.671	0.653
2308	2308 K	40	90	33	0.918	0.895
2309	2309 K	45	100	36	1.230	1.200
2310	2310 K	50	110	40	1.630	1.590
2311	2311 K	55	120	43	2.100	2.050
2312	2312 K	60	130	46	2.590	2.520
2313	2313 K	65	140	48	3.200	3.120
2314	2314 K	70	150	51	3.920	-
2315	2315 K	75	160	55	4.780	4.660
2316	2316 K	80	170	58	5.650	5.510
2317	2317 K	85	180	60	6.550	6.390
2318	2318 K	90	190	64	7.750	7.560
2319	2319 K	95	200	67	9.050	8.830
2320	2320 K	100	215	73	11.500	11.200
2321	2321 K	105	225	77	13.200	-
2322	2322 K	110	240	80	15.800	15.400

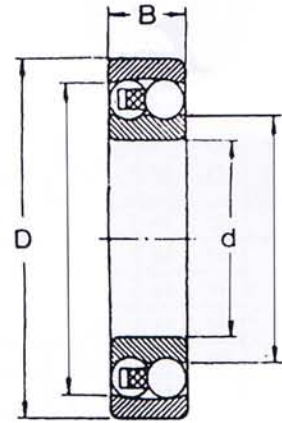